

IN THE UNITED STATES  
PATENT AND TRADEMARK OFFICE

60588 U S PTO  
08777336  
12/27/96

PATENT APPLICATION

David William James HDECs  
Adrian Smith



CASE 7-2

**TITLE** Method And Apparatus For Alerting A Station In One Network Of A  
Requested Communication From A Second Network

**ASSISTANT COMMISSIONER FOR PATENTS**  
WASHINGTON, D.C. 20231

**SIR:**

Enclosed are the following papers relating to the above-named application for patent:

Specification  
2 Informal sheets of drawing(s)  
Information Disclosure Statement

CLAIMS AS FILED				
	NO. FILED	NO. EXTRA	RATE	CALCULATIONS
Total Claims	20 - 20 =	0	x \$22 =	\$0
Independent Claims	5 - 3 =	2	x \$80 =	\$160
Multiple Dependent Claim(s), if applicable			\$260 =	\$0
Basic Fee				\$770
TOTAL FEE:				\$930

Please file the application and charge **AT&T Deposit Account No. 01-2745** the amount of \$930, to cover the filing fee. Duplicate copies of this letter are enclosed. In the event of non-payment or improper payment of a required fee, the Commissioner is authorized to charge or to credit **Deposit Account No. 01-2745** as required to correct the error.

Please address all correspondence to **S. H. Dworesky, AT&T Corp., P. O. Box 4110, Middletown, New Jersey 07748**. However, telephone calls should be made to me at 908-903-6034.

Respectfully,

*Jeffrey M. Weinick*  
Jeffrey M. Weinick  
Reg. No. 36304  
Attorney for Applicant(s)

Date: December 27, 1996  
AT&T Corp.  
P. O. Box 4110  
Middletown, New Jersey 07748

"Express Mail" Mailing label number EH043953375US  
Date of Deposit 12/27/96  
I hereby certify that this application is being deposited with the United States Postal Service "Express Mail" service under 37 CFR 1.51 and is addressed to the Assistant Commissioner for Patents, Washington, D.C. 20231, on 12/27/96

MARGARET CARDOSO  
Printed name of person mailing

*Margaret Cardoso*  
Signature of person mailing



METHOD AND APPARATUS FOR ALERTING A STATION  
IN ONE NETWORK OF A REQUESTED COMMUNICATION  
FROM A SECOND NETWORK

The present application is directed to a method and system for alerting a mobile station coupled to a first network that a communication request for the station appears on a second network. More particularly, the present invention is directed to a method and system for tracking which network a mobile station is coupled to and then translating address information to communicate alert messages to the mobile station with regard to communications on yet another network.

It is known in the field of wireless communications to provide mobile terminal devices in accordance with a standard referred to as IS-136. In accordance with that standard the mobile terminal can have the capability of conducting communication on at least two different networks. One network is the standard wireless voice network while the other network is a packet data network commonly referred to as CDPD (Cellular Digital Packet Data).

An example of a known communication configuration is illustrated in FIG. 1. The mobile station 10 is capable of communicating over either one of two networks, a voice network 100 and a packet network 150. In voice network 100 the mobile station 10 can communicate with any one of a plurality of base stations (102a to 102n) depending on the cell in which the mobile station is located. The base stations are coupled to a mobile switching center (MSC) 101 which controls the

switching for the wireless communications. The MSC 101 can be coupled to the public switch telephone network (PSTN). Typically, when the user of the mobile station turns on the station it will automatically register with the MSC 101 through the base station serving the cell in which the mobile station is located. The mobile station performs this registration through a digital control channel (DCCH) associated with the base station.

A mobile station 10 is also capable of packet data communication. These communications are handled via packet network 150. Packets symbolically represented as elements 151 are received by a mobile data intermediate system or mobile gateway (MDIS) 152 which in essence is a packet data counterpart to the MSC 101. The MDIS 152 can communicate with a plurality of mobile data base stations such as MDBS 153 which can send wireless transmissions to the mobile station 10 when that station is in the cell served by the MDBS. When the mobile station wishes to register for purposes of engaging in packet data communications, it does so over a packet control channel (PCCH) associated with the MDBS 153.

Presently, because of the different architecture of these two networks, the voice network and the packet network, there is a lack of commonality of interfaces. As a consequence, while the mobile station 10, is "camped on" to the control channel for one of the two networks, (i.e., while it is set to communicate control information to or receive information from a base station relating to one of the control channels), it cannot receive any information from the other network. For example, if mobile station 10 is camped on to a DCCH, then any attempt at providing a packet data transmission or communication to mobile station 10 in the known network configuration, is impossible. There is no way to signal the mobile station 10 over the PCCH since the mobile station is locked onto or camped onto the DCCH. Similarly, should the mobile station be

camped onto the packet network, PCCH in anticipation of packet data communication, it is unable to receive any notice of a communication via the voice network.

It is desirable to provide a system in which the mobile station, while active and camped on in one network, can receive notices of communications on another network with which it is capable of communicating.

#### 10 SUMMARY OF THE INVENTION

In accordance with the present invention, the mobile switching center of the voice network and the MDIS of the packet data network can be in communication with one another either indirectly via a memory or directly. The indirect or direct communications operate to provide mobile station address information from the network on which the mobile station is camped to the alternative network. Then, alternative network, upon receipt of a communication request for the mobile station, can generate a request to the mobile station through the network on which it is camped to advise the mobile station of the existence of an attempted communication on the alternative network. This alert or notice can be generated directly by the alternative network which could use an address translator to identify the address of the mobile station on the network on which it is camped and can create a message of appropriate structure for the network in which the mobile station is camped.

Alternatively, the network receiving the communication request could send a communication request trigger to the network to which the mobile station is camped and that latter network could generate the appropriate address and message alert for the mobile station.

The present invention permits the mobile station to receive notice of communication requests from the

network or networks with which it has registered but on which it is not camped (that is, to which it has identified itself while its in the region of interest).

## 5 SUMMARY OF THE DRAWINGS

FIG. 1 illustrates a known network configuration of a voice network and a data network with which a mobile station can communicate.

FIG. 2 illustrates a first embodiment of the  
10 present invention.

FIG. 3 illustrates an address translation table useful in connection with the embodiment of FIG. 2.

FIG. 4 illustrates a process flow in connection with an implementation of an embodiment of the present  
15 invention.

## DETAILED DESCRIPTION

FIG. 2 illustrates an embodiment of the present invention. The base station 102, the mobile database  
20 station 153 and the mobile station 10 correspond to the same elements that appear in FIG. 1. In accordance with the embodiment of FIG. 2, the mobile switching center 201 and the mobile data intermediate station or gateway 252 are both coupled to a database 220. The two  
25 elements are also coupled to one another.

It is known at present that in actual installation, the MSC and MDIS may be in the same rack of equipment. In accordance with the present invention these two elements would now, for the first time, be coupled to  
30 one another so as to be able to communicate requests for data transmission through one another to enhance the ability of the mobile station to be notified of pending communication requests. The database 220 could store an address translation table, an example of which is shown  
35 in FIG. 3. That translation table would correlate a mobile identification number (MIN) of the mobile station with the IP (Internet protocol) Address associated with

the mobile station. The embodiment illustrated in FIG. 2 could operate in accordance with the process set forth in FIG. 4.

In accordance with a known registration procedure, once the mobile station is turned on, it will register with the DCCH of the cell in which it is located. After registering with the DCCH, the mobile station will then register with the PCCH in step 402. Then, depending on the user's preference for communications, the mobile station will camp onto either the DCCH or the PCCH as indicated in step 403. After camping on, the visitor location register (VLR) for that cell would be notified of the control channel selection of the mobile station in step 404. As a consequence, the VLR would store, for example as a flag, information identifying that network on which the mobile station is camped on.

If a request for a voice communication is sent, then the voice communication request arrives to MSC 201 which checks the VLR for which network the mobile station is camped, step 410. If the mobile station is camped on the DCCH, then the MSC will process the voice communication as normal, step 411. If, however, the MSC determines upon inspection of the VLR that the mobile station is camped on the PCCH in the packet network the processing differs. The MSC can then translate the MIN of the mobile station to an IP address by accessing the address translation table stored in database 220, step 412. Subsequently, the MSC sends a request to the MDIS to send an alert to the appropriate IP address for the MS 10, step 413. In one possible embodiment, the MSC merely sends a trigger along with the IP address and the MDIS creates a packet data signal for transmission to MS 10 over the PCCH. Alternatively, the MSC 201 could take the IP address data and construct its own packet message, thereby replicating a packet data communication request and transmit that request to the MDIS which would then act merely as a pass through device.

Once the mobile station receives the notice of the communication request from the voice network, the mobile station can elect to camp on the DCCH or to not respond to the communication request and remain camped on the PCCH.

An analogous operation is performed at the MDIS when a request for packet communication is received. The MDIS can check the VLR for determination of the network to which the MS is camped on. If MS 10 is camped on the PCCH then MDIS 252 processes the request for packet communication in a normal fashion. If, however, mobile station 10 is camped on the DCCH, then MDIS 252 can access the database 220 to translate the IP address to a MIN, step 422. The MDIS then requests the MSC 201 to send an alert to the appropriate MIN, step 433. As described above, the MDIS could simply transmit a trigger to MSC 201 which would then initiate signaling, via the DCCH, to notify mobile station 10. Alternatively, MDIS 252 could attempt to replicate a voice communication request such as those which arrive from the PSTN using the appropriate MIN.


In accordance with the present invention, the voice network and the packet data network communicate with one another in such a manner that they can notify the mobile station 10 that a communication awaits it on a network to which it is not camped on.

In the embodiment described with respect to FIG. 4, it is described that the mobile station first registers with DCCH and then with PCCH. The order of registration could be reversed.

Furthermore, in the embodiment illustrated in FIG. 2, a separate database is accessible by both the MSC and the MDIS. Other alternatives exist. For instance, the database could be either the MSC or MDIS and not directly connected to the counterpart in the other network. Or, alternatively, MSC and MDIS could each maintain its own address translation table. In such a

circumstance then, the MSC and MDIS would have to communicate with one another during the registration process so as to advise one another of the appropriate network addresses for the mobile station to guarantee  
5 that they would be properly correlated with one another.

Additionally, the present invention has been described in the context of voice/packet data networks. It has equal applicability to any multimode station capable of communicating with distinct networks in its  
10 different operational modes, such as voice and paging networks for example. Thus, in accordance with the present invention, a mobile station which is capable of communicating with multiple networks such as a voice network and a packet data network, can receive  
15 notification of the existence of a communication request from one of the networks while the mobile station is camped onto one of the other networks.

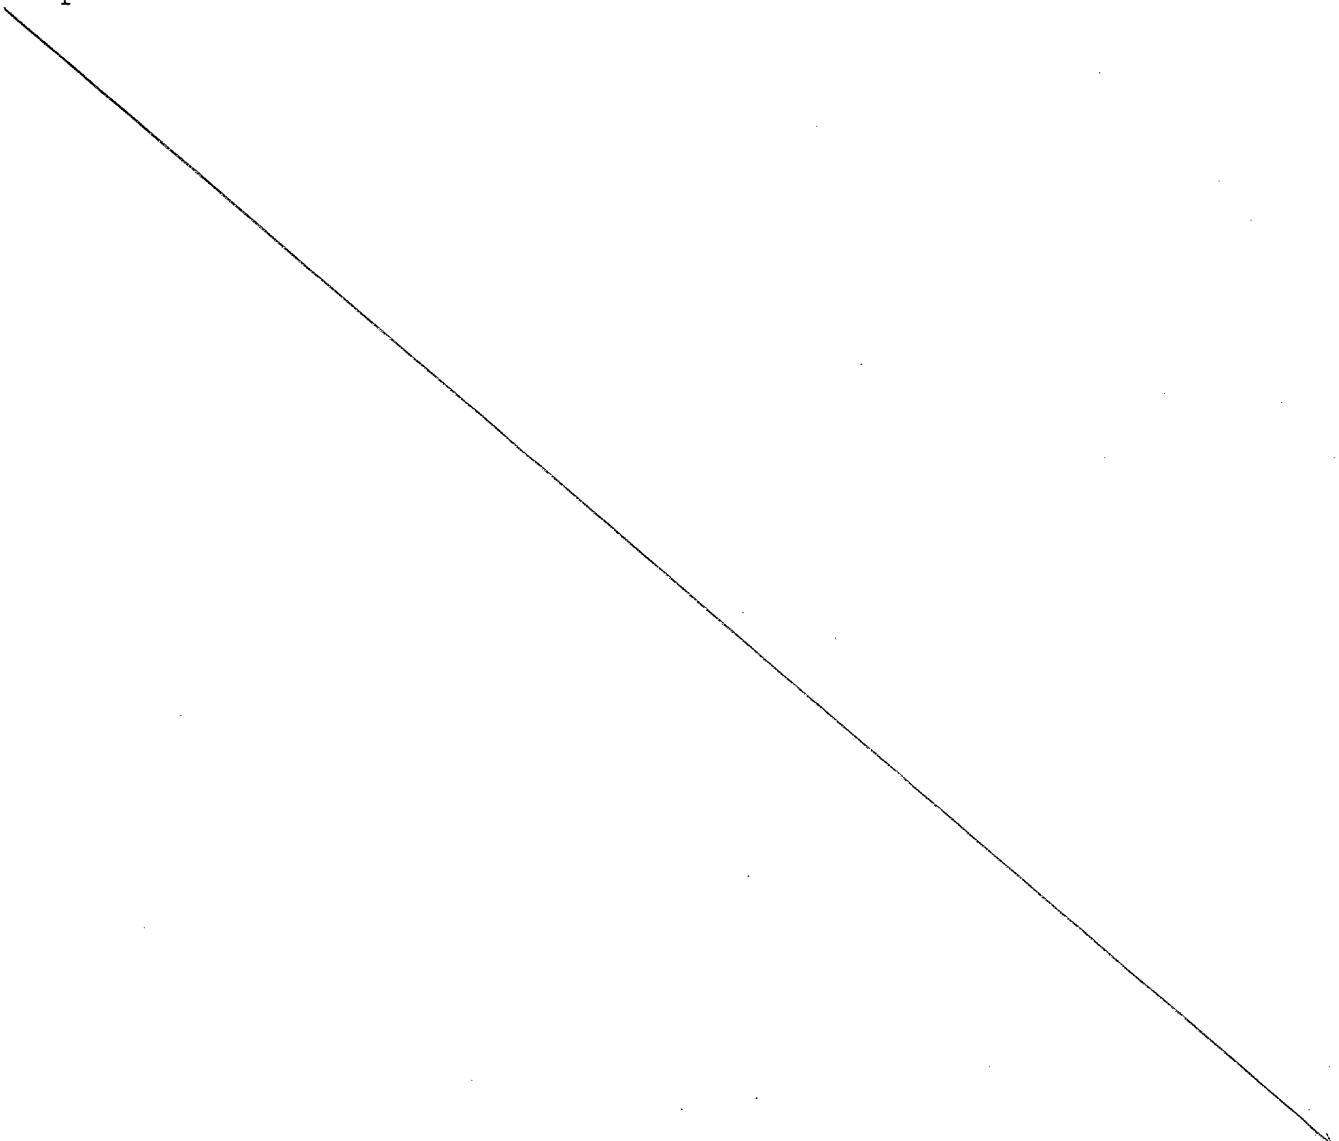

95/02/95 13:13:55



## WHAT IS CLAIMED IS:

- 1 1. In a communication system comprising a first  
2 network and a second network wherein a mobile station is  
3 capable of being coupled to either one of the first and  
4 second networks, a method for notifying the mobile  
5 station of a communication on a network to which the  
6 station is not presently coupled, the method comprising  
7 the steps of:  
8 storing an address for the mobile station as it is  
9 coupled to one of said first and second networks;  
10 receiving a communication request from that one of  
11 said first and second networks to which the mobile  
12 station is not presently coupled;  
13 using the stored address of the mobile station as  
14 it is coupled to one of said first and second networks  
15 to send an alert that said communication request has  
16 been received.
- 1 2. The method of claim 1 wherein said step of storing  
2 comprises the steps of:  
3 detecting when the mobile station changes the  
4 network to which it is coupled; and  
5 updating a memory with an address of the mobile  
6 station in the network to which it is coupled.
- 1 3. The method of claim 1 wherein said first network is  
2 a voice network and said second network is a paging  
3 network.
- 1 4. The method of claim 1 wherein said first network is  
2 a voice network and said second network is a data  
3 network.
- 1 5. The method of claim 4 wherein;  
2 the mobile station is initially coupled to said  
3 first network;

4        said step of storing occurs after the mobile  
5 station changes its coupling to the second network; and  
6        said step of receiving receives a communication  
7 request from said first network.

1 6.    The method of claim 4 wherein the step of receiving  
2 receives a communication request from said second  
3 network.

1 7.    The method of claim 4 wherein;  
2        the mobile station is initially coupled to said  
3 second network;  
4        said step of storing occurs after the mobile  
5 station changes its coupling to said first network; and  
6        said step of receiving receives a communication  
7 request from said first network.

1 8.    The method of claim 4 wherein said data network is  
2 a packet data network.

1 9.    The method of claim 4 wherein said first network is  
2 a voice network and said second network is a paging  
3 network.

1 10.   The method of claim 1 wherein said alert includes  
2 information regarding said received communication  
3 request.

1 11.   The method of claim 10 wherein said information  
2 includes how the mobile station should connect to the  
3 communication.

1 12.   In a wireless communication system comprising a  
2 voice network and a data network, wherein a mobile  
3 station can camp onto the voice network via a first  
4 control channel and can camp onto the data network via a  
5 second control channel, a method for notifying the

964341-964341

6 mobile station of a communication from the voice network  
7 while it is camped on the data network, the method  
8 comprising the steps of:

9       storing an address for the mobile station as it is  
10 camped on the data network;

11       receiving a communication request for the mobile  
12 station from the voice network;

13       using the stored address of the mobile station to  
14 send an alert via said data network that said  
15 communication request has been received.

1 13. In a wireless communication system comprising a  
2 voice network and a data network, wherein a mobile  
3 station can camp onto the voice network via a first  
4 control channel and can camp onto the data network via a  
5 second control channel, a method for notifying the  
6 mobile station of a communication from the data network  
7 while it is camped on the voice network, the method  
8 comprising the steps of:

9       storing an address for the mobile station as it is  
10 camped on the voice network;

11       receiving a communication request for the mobile  
12 station from the data network;

13       using the stored address of the mobile station to  
14 send an alert via said voice network that said  
15 communication request has been received.

1 14. A communication system for permitting communication  
2 requests to follow a mobile station after it changes  
3 networks, the system comprising:

4       memory storing an address of a mobile station on a  
5 network to which it is coupled;

6       a communication receiver that receives a  
7 communications request on a network to which the mobile  
8 station is not coupled; and

9       a processor, coupled to said memory and said  
10 communication receiver and using said address of the

954221 987430

11 mobile station to alert the mobile station that said  
12 communication request was received.

1 15. The system of claim 14 wherein the mobile station  
2 is coupled to a voice network and then changes to a data  
3 network, said communication request being received by  
4 said voice network.

1 16. The system of claim 14 wherein the mobile station  
2 is coupled to a data network and then changes to a voice  
3 network, said communication request being received by  
4 said data network.

1 17. A wireless communication system for forwarding  
2 communication requests across networks comprising:  
3 a voice network including a mobile switching  
4 center;  
5 a data network including a mobile data intermediate  
6 system;  
7 a memory coupled to said voice network and said  
8 data work and storing address information for the mobile  
9 station as it is camped on said data network.

1 18. The system of claim 17 further comprising a  
2 processor coupled to said voice network and said memory  
3 that, upon receipt of a communication request on said  
4 voice network accesses the stored address information  
5 for the mobile station and notifies the mobile station  
6 of receipt of said communication request.

1 19. The system of claim 18 wherein notification of the  
2 mobile station of receipt of said communication request  
3 includes information regarding the communication.

1 20. The method of claim 19 wherein said information  
2 includes how the mobile station should connect to the  
3 communication.

## ABSTRACT OF THE DISCLOSURE

A mobile station can be selectively coupled to two or more networks. By maintaining an address translation table and introducing communication between the switching control units within the multiple networks, it is possible to provide notification to the mobile station of the existence of a communication request from a first network while the mobile station coupled to the second network.

0877336 12395  
95/02/95 05/02/95

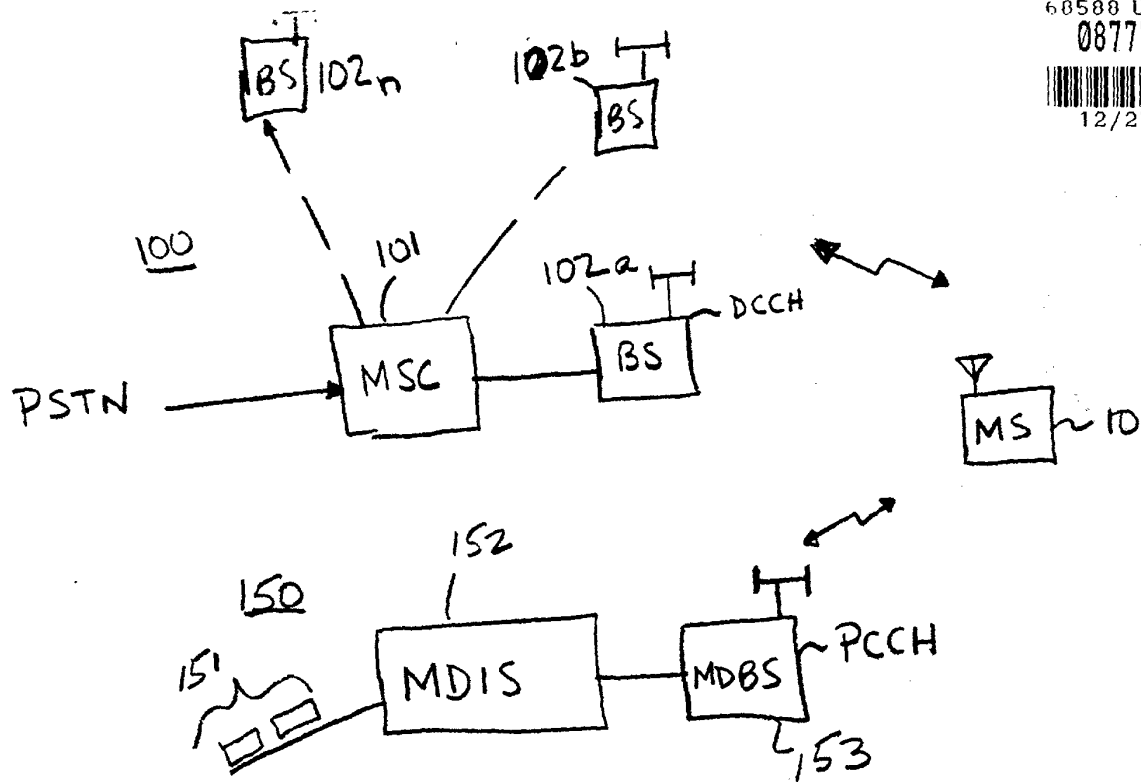


FIG. 1

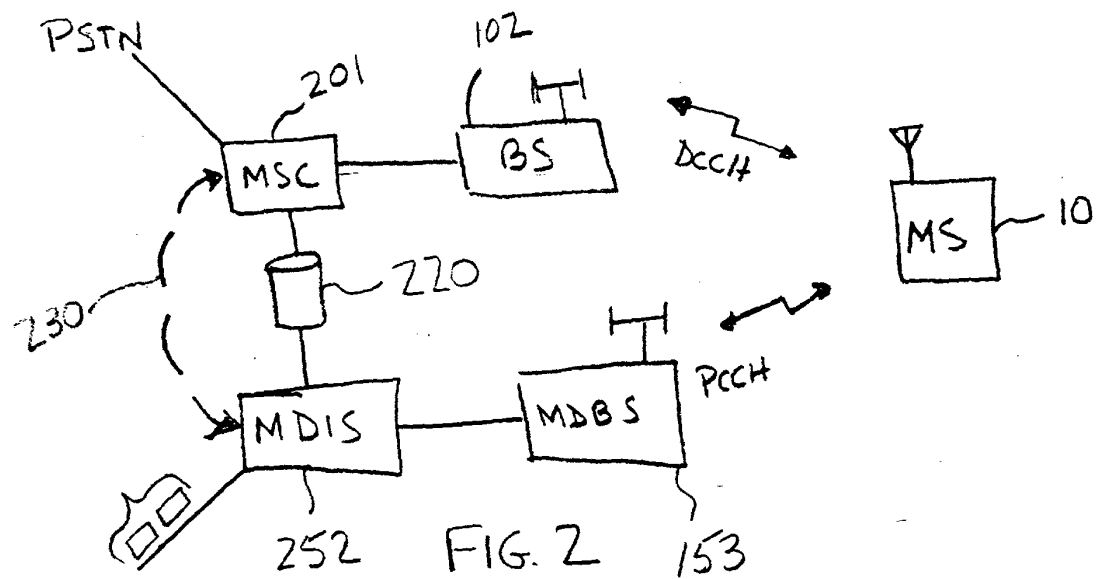


FIG. 2

MIN	IP ADDRESS
XXX XXXX	YYY. YYY. YY. YY

FIG. 3

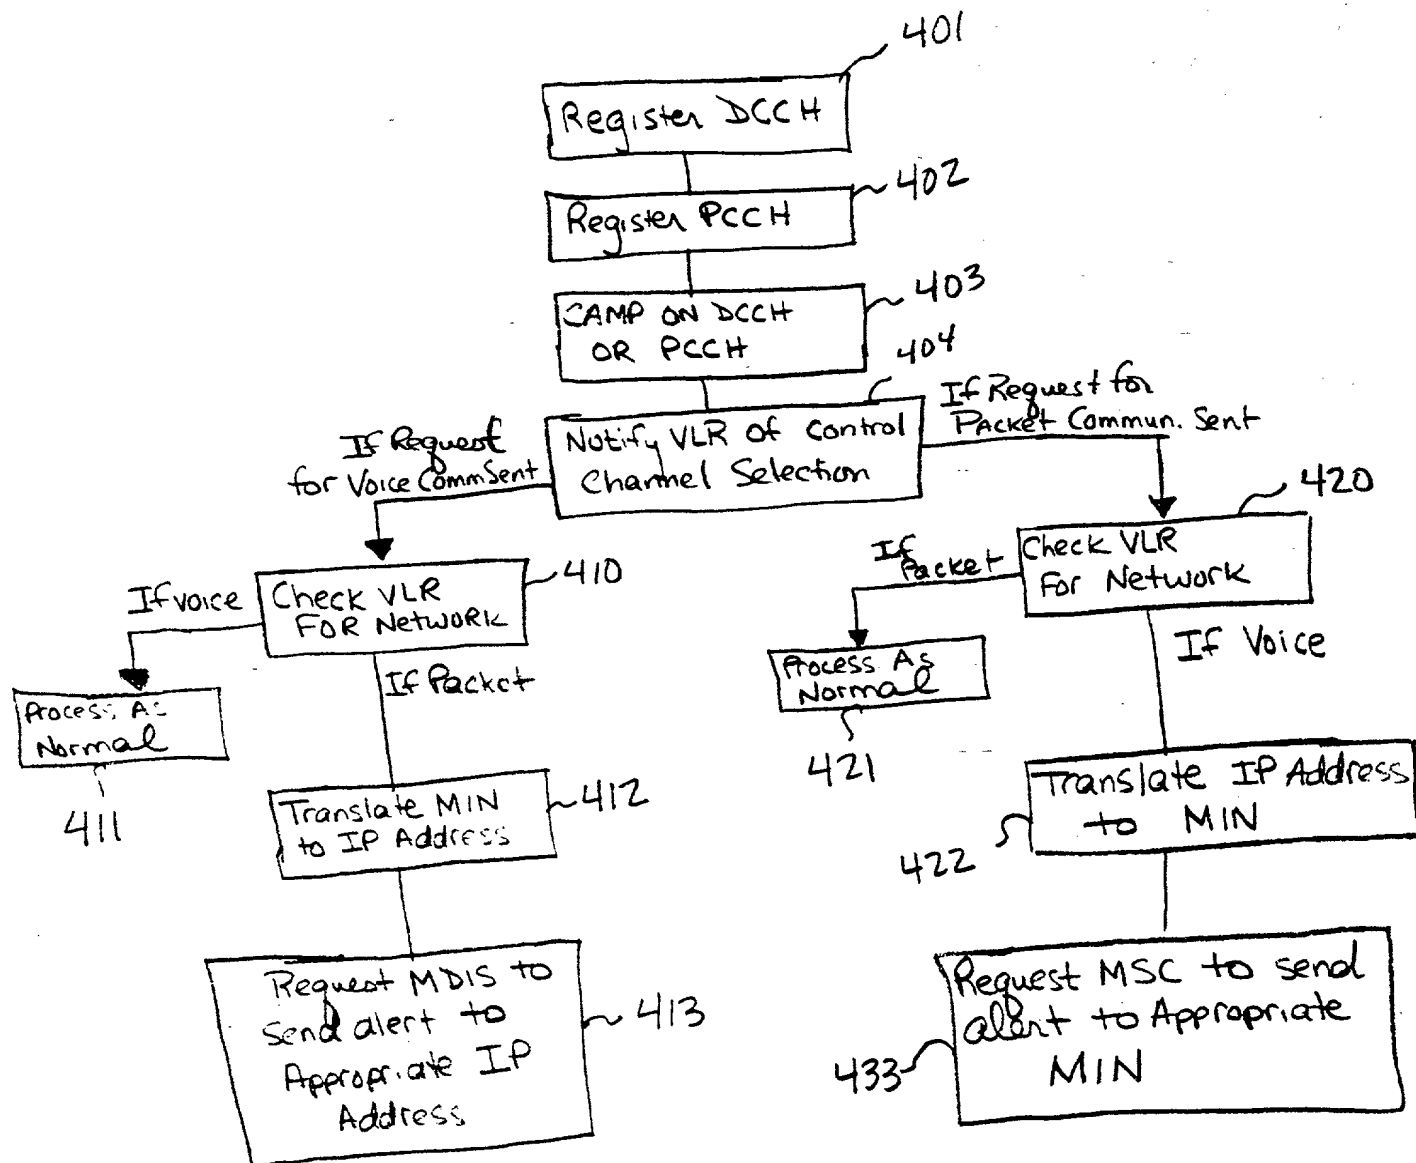


FIG. 4



IN THE UNITED STATES  
PATENT AND TRADEMARK OFFICE

Declaration and Power of Attorney

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe I am an original, first and joint inventor of the subject matter which is claimed and for which a patent is sought on the invention entitled **Method And Apparatus For Alerting A Station In One Network Of A Requested Communication From A Second Network** the specification of which was filed on December 27, 1996, as application Serial No. 08/777336.

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by an amendment, if any, specifically referred to in this oath or declaration.

I acknowledge the duty to disclose all information known to me which is material to patentability as defined in Title 37, Code of Federal Regulations, 1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, 119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

None

I hereby claim the benefit under Title 35, United States Code, 120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, 112, I acknowledge the duty to disclose all information known to me to be material to patentability as defined in Title 37, Code of Federal Regulations, 1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application:

None

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

08777336-1 12/27/96



D.W.J. Holmes 7-2

I hereby appoint the following attorney(s) with full power of substitution and revocation, to prosecute said application, to make alterations and amendments therein, to receive the patent, and to transact all business in the Patent and Trademark Office connected therewith:

3 Samuel H. Dworetsky (Reg. No. 27873)  
Henry T. Brendzel (Reg. No. 26844)  
Jeffrey M. Weinick (Reg. No. 36304)

Please address all correspondence to Mr. S. H. Dworetsky, AT&T Corp., P. O. Box 4110, Middletown, New Jersey 07748. Telephone calls should be made to Jeffrey M. Weinick by dialing 908-903-6034.

100 Full name of 1st joint inventor: David William James Holmes

Inventor's signature David William James Holmes Date 3/31/97

Residence: Redmond, King County, Washington WA

Citizenship: Great Britain

Post Office Address: 2019 213th Avenue, N.E.  
Redmond, Washington 98053

200 Full name of 2nd joint inventor: Adrian Smith

Inventor's signature Adrian Smith Date 3/27/97

Residence: Kirkland, King County, Washington WA

Citizenship: Great Britain

Post Office Address: 9320 NE Juanita Drive #2B  
Kirkland, Washington 98034

0877336 133796  
96/001 96/001